

R-BRUSH Manual Wire Brushes

Brush accessory for cleaning out holes prior to anchor installation




Product information

Features and benefits

- Ideal for cleaning dust from drilled holes prior to applying bonded anchors or installing mechanical anchors
- Hole cleaning is necessary for correct loads
- Suitable for variable anchor embedment depths.
- Suitable for repetitive and frequent use.

Installation guide

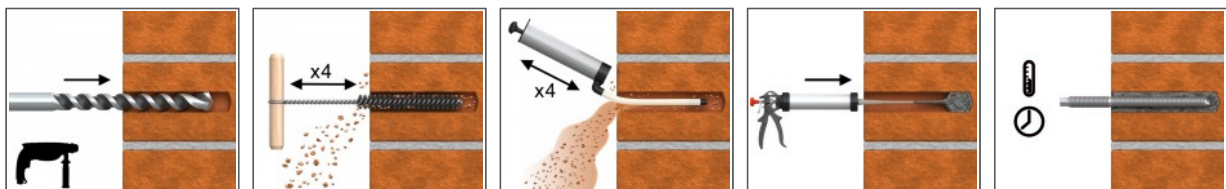

1. Drill hole to the required diameter and depth for stud size being used.
2. Before inserting anchor, clean inside of hole by brushing repeatedly (use hole pump to clear dust and debris first).

Product information

Size	Product Code	Drill diameter
		[mm]
M8	R-BRUSH-M08/M	M8
M10	R-BRUSH-M10/M	M10
M12	R-BRUSH-M12/M	M12
M16	R-BRUSH-M16/M	M16
M20	R-BRUSH-M20/M	M20
M24	R-BRUSH-M24/M	M24
M30	R-BRUSH-M30/M	M30

Product commercial data

Size	Product Code	Drill diameter [mm]	Quantity [pcs]			Weight [kg]			Bar Codes
			Box	Outer	Pallet	Box	Outer	Pallet	
M8	R-BRUSH-M08/M	M8	1	10	300	0.10	1.01	60.3	5906675249759
M10	R-BRUSH-M10/M	M10	1	10	500	0.10	1.01	80.6	5906675249766
M12	R-BRUSH-M12/M	M12	1	10	500	0.03	0.34	47.0	5906675249773
M16	R-BRUSH-M16/M	M16	1	10	400	0.04	0.36	44.4	5906675249780
M20	R-BRUSH-M20/M	M20	1	10	250	0.10	1.01	55.3	5906675249797
M24	R-BRUSH-M24/M	M24	1	10	250	0.10	1.01	55.3	5906675249803
M30	R-BRUSH-M30/M	M30	1	10	300	0.06	0.64	49.2	5906675249810